



DIN 7985

Suruburi cu cap semirotund si
 amprenta tip PH
 Grupa: 4,8
 Acop. de potectie: zincare electro-
 litica

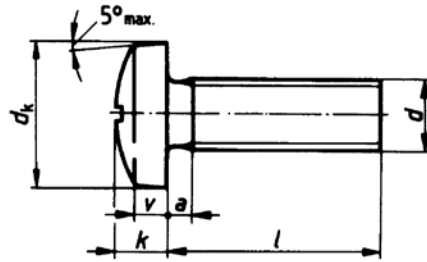

d		M2	M2,5	M3	M4	M5	M6	M8	M10
P		0,4	0,45	0,5	0,7	0,8	1	1,25	1,5
dk	min.	3,7	4,7	5,7	7,64	9,64	11,57	15,57	19,48
	nom.	4	5	6	8	10	12	16	20
k	min.	1,48	1,88	2,28	2,95	3,65	4,45	5,85	7,32
	max.	1,72	2,12	2,52	3,25	3,95	4,75	6,15	7,68
v	ref.	1,1	1,3	1,25	1,75	2	2,5	3,2	3,8
a	max.	0,8	0,9	1	1,4	1,6	2	2,5	3
m	PH	1			2		3	4	
	ref.	2,5	2,7	3,1	4,6	5,3	6,8	9	10,2

l \ d	M2	M2,5	M3	M4	M5	M6	M8	M10
4	-	-	X	-	-	-	-	-
5	X	X	X	X	-	-	-	-
6	X	X	X	X	X	-	-	-
8	X	X	X	X	X	X	-	-
10	X	X	X	X	X	X	X	-
12	X	X	X	X	X	X	X	X
16	X	X	X	X	X	X	X	X
20	X	X	X	X	X	X	X	X
25	-	X	X	X	X	X	X	X
30	-	-	X	X	X	X	X	X
35	-	-	X	X	X	X	X	X
40	-	-	X	X	X	X	X	X
45	-	-	X	X	X	X	X	X
50	-	-	X	X	X	X	X	X
55	-	-	-	X	X	X	-	-
60	-	-	X	X	X	X	X	X
70	-	-	-	X	X	X	X	X
80	-	-	-	X	X	X	X	X
90	-	-	-	-	X	X	X	X
100	-	-	-	-	X	X	X	X

DIN 7985 4,8