


DIN 84

Surub cu cap rotund si
 amprenta surubelnita

Gr: 4.8

Acop: zincare electro-
 litica

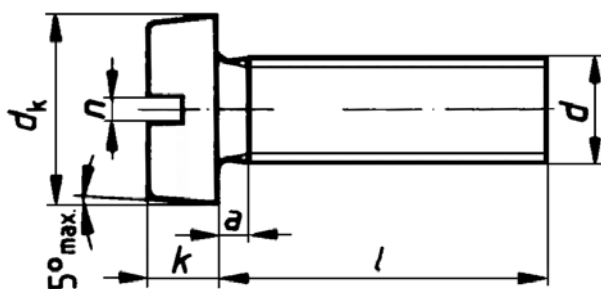

d		M2	M2,5	M3	M4	M5	M6	M8	M10
P		0,4	0,45	0,5	0,7	0,8	1	1,25	1,5
dk	min.	3,62	4,32	5,32	6,78	8,28	9,78	12,73	15,73
	nom.	3,8	4,5	5,5	7	8,5	10	13	16
k	min.	1,16	1,46	1,86	2,46	3,12	3,6	4,7	5,7
	nom.	1,3	1,6	2	2,6	3,3	3,9	5	6
n	min.	0,56	0,66	0,86	1,26	1,26	1,66	2,06	2,56
	max.	0,7	0,8	1	1,51	1,51	1,91	2,31	2,81
a	max.	0,8	0,9	1	1,4	1,6	2	2,5	3

l \ d	M2	M2,5	M3	M4	M5	M6	M8	M10
5	X	X	X	X	-	-	-	-
6	X	X	X	X	X	-	-	-
8	X	X	X	X	X	X	-	-
10	X	X	X	X	X	X	X	-
12	X	X	X	X	X	X	X	X
14	-	-	-	-	X	-	-	-
16	X	X	X	X	X	X	X	X
20	X	X	X	X	X	X	X	X
25	-	X	X	X	X	X	X	X
30	-	-	X	X	X	X	X	X
35	-	-	-	X	X	X	X	X
40	-	-	X	X	X	X	X	X
45	-	-	X	-	X	X	X	X
50	-	-	X	X	X	X	X	X
60	-	-	X	X	X	X	X	X
70	-	-	-	X	X	X	X	X
80	-	-	-	X	X	X	X	X