


DIN 963

Surub cap inecat,
 amprenta surubelnita

Gr: 4.8

Acop: zinc.electrolitica

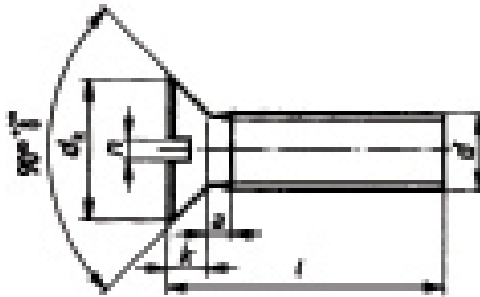

d		M2	M2,5	M3	M4	M5	M6	M8	M10	M12
P		0,4	0,45	0,5	0,7	0,8	1	1,25	1,5	1,75
dk	min.	3,5	4,4	5,3	7,14	8,84	10,57	14,07	17,57	21,48
	nom.	3,8	4,7	5,6	7,5	9,2	11	14,5	18	22
k	max.	1,2	1,5	1,65	2,2	2,5	3	4	5	6
n	min.	0,56	0,66	0,86	1,06	1,26	1,66	2,06	2,56	3,06
	max.	0,7	0,8	1	1,2	1,51	1,91	2,31	2,81	3,31
a	max.	0,8	0,9	1	1,4	1,6	2	2,5	3	3,5

l \ d	M2	M2,5	M3	M4	M5	M6	M8	M10	M12
5	X	X	X	X	-	-	-	-	-
6	X	X	X	X	X	-	-	-	-
8	X	X	X	X	X	X	-	-	-
10	X	X	X	X	X	X	X	-	-
12	X	X	X	X	X	X	X	X	-
16	X	X	X	X	X	X	X	X	-
20	X	X	X	X	X	X	X	X	X
25	-	X	X	X	X	X	X	X	X
30	-	-	X	X	X	X	X	X	X
35	-	-	X	X	X	X	X	X	X
40	-	-	X	X	X	X	X	X	X
45	-	-	X	X	X	X	X	X	X
50	-	-	X	X	X	X	X	X	X
60	-	-	X	X	X	X	X	X	X
70	-	-	-	X	X	X	X	X	X
80	-	-	-	X	X	X	X	X	X
90	-	-	-	-	X	X	X	X	X
100	-	-	-	-	X	X	X	X	X