


**Surub.ptr.placi de lemn  
 cap inecat amprenta (PZ)  
 Acop.:zincare galbena**

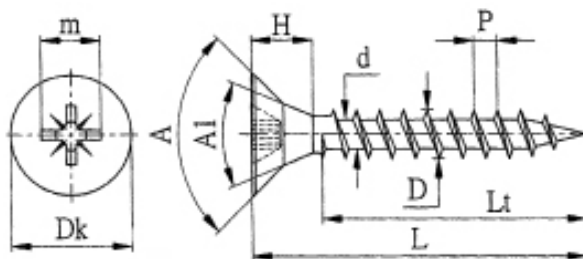

A: min: 90° max: 92°  
 A1: min: 45° max: 47°

D	max.	2,5	3	3,5	4	4,5	5	6
	min.	2,25	2,8	3,3	3,75	4,25	4,7	5,7
P		1,1	1,22	1,44	1,62	1,8	1,98	2,34
Dk	min.	4,7	5,6	6,6	7,5	8,5	9,5	11,5
	max.	5	6	7	8	9	10	12
m	PZ	1		2				3
	ref.	2,51	3	4	4,4	4,8	6,3	6,6
H		2,6	3,2	3,6	4,25	4,6	5,2	6
d	min.	1,1	1,75	2	2,25	2,45	2,8	3,5
	max.	1,5	2	2,25	2,5	2,7	3,1	3,8

L \ D	2,5	3	3,5	4	4,5	5	6
12	X	X	X	X	-	-	-
16	X	X	X	X	X	-	-
20	X	X	X	X	X	X	-
25	-	X	X	X	X	X	-
30	-	X	X	X	X	X	X
35	-	X	X	X	X	X	X
40	-	X	X	X	X	X	X
45	-	X	X	X	X	X	X
50	-	X	X	X	X	X	X
55	-	-	-	X	X	X	-
60	-	-	-	X	X	X	X
70	-	-	-	X	X	X	X
80	-	-	-	X	X	X	X
90	-	-	-	-	-	X	X
100	-	-	-	-	-	X	X
110	-	-	-	-	-	-	X
120	-	-	-	-	-	X	X
130	-	-	-	-	-	-	X
140	-	-	-	-	-	-	X
150	-	-	-	-	-	-	X
160	-	-	-	-	-	-	X
180	-	-	-	-	-	-	X
200	-	-	-	-	-	-	X
220	-	-	-	-	-	-	X